

Super Duplex Stainless Steel ZERON® 100 for the Oil and Gas Industry



Specifications

UNS: S32760 **W. Nr./EN:** 1.4501 **ASTM:** A 182 (Grade F55), A 240, A 276, A 314, A 473, A 479, A 789, A 790, A 815, A 890, A 928, A 988, A 995, EN 10028-7, EN 10088-2, EN 10088-3, EN 10272, EN 10216-5, EN 10217-7
ASME: B16.5, B16.34, B16.47, B31.3, Section VIII Division 1 Case 2244-2, 2245-1, Section III Division 1 Case N-564-2, SA-240, SA-182 (Grade F55), SA-479, SA-815, SA-789, SA-790 **NACE:** ISO 15156 / MRO175 Part 3 **API:** 5LC **BSI:** PD 5500 - Enquiry Case 5500/87

Chemical Composition, %

	Ni	Cr	Mo	Mn	Cu	Si	C	N	S	P	W	Fe
MIN	6.0	24.0	3.0	—	0.5	—	—	0.2	—	—	0.5	—
MAX	8.0	26.0	4.0	1.0	1.0	1.0	0.03	0.3	0.01	0.03	1.0	balance

ZERON 100 Advantages

- ZERON 100 is a 25% chromium superduplex stainless steel.
- The high alloy content gives ZERON 100 excellent corrosion resistance in both sweet and sour brines.
- ZERON 100 has excellent resistance to both chloride and sulfide stress corrosion cracking.
- Good low temperature impact properties and fracture toughness.
- The high strength gives ZERON 100 excellent erosion resistance.
- ZERON 100 is listed in ASME codes for vessels and pipes.
- The high strength allows for reduction in weight of the pipework systems.
- Fully weldable by all arc welding processes.
- Stock availability for end users, OEM's, pump and valve companies.




ZERON 100
Product Range

Pipe/Tubing (Seamless and welded)	0.5" - 48"
Fittings (Seamless and welded)	0.5" - 48"
Flanges	ASME and API
Sheet	up to 2mm
Plate	3mm - 50mm
Bar	6mm - 300mm (dia)
Welding Consumables	GTAW, SMAW, GMAW, SAW

Also available as:

- Forgings
- Seam welded tubing
(for umbilicals, heat exchanger
and instrument tubing)
- Fasteners
- Wirelines

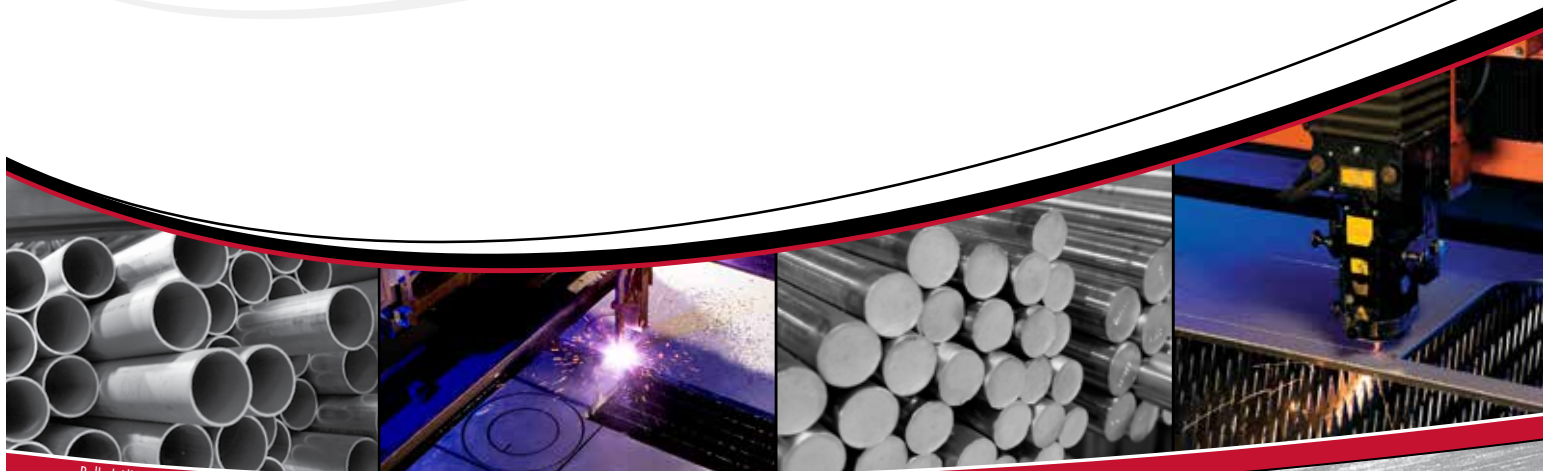

Rolled Alloys, RA, and ZERON are registered trademarks of Rolled Alloys



The Global Leader in Specialty Metals